



CONSOLIDATED
ENERGY

TESLA POWERWALL DATASHEET

HOME BATTERY

[CONSOLIDATEDENERGY.COM.AU](https://www.consolidatedenergy.com.au)



POWERWALL 2 AC

The Tesla Powerwall is a fully-integrated AC battery system for residential or light commercial use. Its rechargeable lithium-ion battery pack provides energy storage for solar self-consumption, load shifting and backup power.

Powerwall's electrical interface provides a simple connection to any home or building. Its revolutionary compact design achieves market-leading energy density and is easy to install, enabling owners to quickly realize the benefits of reliable, clean power.

PERFORMANCE SPECIFICATIONS

AC Voltage (Nominal)	208 V, 220 V, 230 V, 277 V, 100/200 V, 120/240 V
Feed-In Type	Single & Split-Phase
Grid Frequency	50 and 60 Hz
AC Energy ¹	13.2 kWh
Real Power, max continuous ²	5 kW (charge and discharge)
Real Power, peak (10s) ²	7 kW (discharge only)
Apparent Power, max continuous ²	5.8 kVA (charge and discharge)
Apparent Power, peak (10s) ²	7.2 kVA (discharge only)
Imbalance for Single-Phase Loads	100%
Power Factor Output Range	+/- 1.0 adjustable
Power Factor (full-rated power)	+/- 0.85
Depth of Discharge	100%
Internal Battery DC Voltage	50 V
Round Trip Efficiency ^{1,3}	89.0%
Warranty	10 years

¹Values provided for 25°C (77°F), 3.3 kW charge/discharge power.

²Values region-dependent.

³AC to battery to AC, at beginning of life.

ENERGY GATEWAY SPECIFICATIONS

User Interface	Tesla App
Connectivity	Wi-Fi, Ethernet, 3G
AC Meter	Revenue grade
Operating Modes	Support for wide range of usage scenarios
Backup Operation	Optional automatic disconnect switch
Modularity	Supports up to 9 AC-coupled Powerwalls

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Storage Temperature	-30°C to 60°C (-22°F to 140°F)
Operating Humidity (RH)	Up to 100%, condensing
Maximum Altitude	3000 m (9843 ft)
Environment	Indoor and outdoor rated
Enclosure Type	NEMA 3R
Ingress Rating	IP67 (Battery & Power Electronics) IP56 (Wiring)
Noise Level @ 1m	<40 dBA at 30°C (86°F)


MECHANICAL SPECIFICATIONS

Dimensions	1150 mm x 755 mm x 155 mm (45.3 in x 29.7 in x 6.1 in)
Weight	122 kg (269 lbs)
Mounting options	Floor or wall mount

COMPLIANCE INFORMATION

Safety	UL 1642, UL 1741, UL 1973, UL 9540, UN 38.3, IEC 62109-1, IEC 62619, CSA C22.2.107.1
Grid Standards	Worldwide Compatibility
Emissions	FCC Part 15 Class B, ICES 003, EN 61000 Class B
Environmental	RoHS Directive 2011/65/EU, WEEE Directive 2012/19/EU, 2006/66/EC
Seismic	AC156, IEEE 693-2005 (high)

TYPICAL SYSTEM LAYOUT

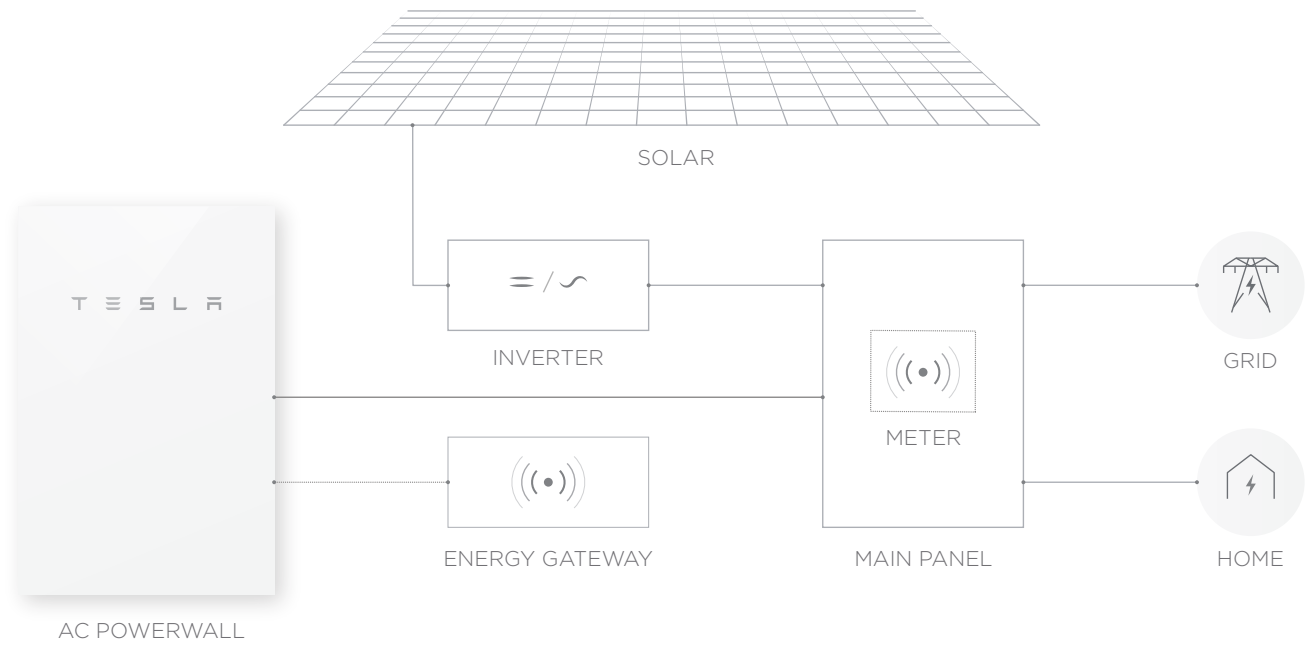



POWERWALL 2 DC

The Tesla Powerwall is a DC battery system for residential or light commercial use. Its rechargeable lithium-ion battery pack provides energy storage for solar self-consumption, load shifting and backup power.

Powerwall's electrical interface is provided by an internal isolated bi-directional DC/DC converter that controls the charge and discharge of the battery for integration with grid-tied solar inverters. Its revolutionary compact design achieves market-leading energy density and is easy to install, enabling owners to quickly realize the benefits of reliable, clean power.

PERFORMANCE SPECIFICATIONS

DC Energy ¹	13.5 kWh
Power, continuous	5 kW (charge and discharge)
Power, peak (10s)	7 kW (discharge only)
DC Voltage Range	350–550 V
DC Current, continuous	14.3 A
DC Current, peak (10s)	20 A
Depth of Discharge	100%
Internal Battery DC Voltage	50 V
Round Trip Efficiency ^{1,2}	91.8%
Warranty	10 years

¹Values provided for 25°C (77°F), 3.3 kW charge/discharge power.

²DC to battery to DC, at beginning of life.

INTERFACE SPECIFICATIONS

Communication Protocols	Modbus (RS485), CAN
Modularity	Multi-Powerwall capability with compatible inverters
User Interface	Tesla App

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	–20°C to 50°C (–4°F to 122°F)
Storage Temperature	–30°C to 60°C (–22°F to 140°F)
Operating Humidity (RH)	Up to 100%, condensing
Maximum Altitude	3000 m (9843 ft)
Environment	Indoor and outdoor rated
Enclosure Type	NEMA 3R
Ingress Rating	IP67 (Battery & Power Electronics) IP56 (Wiring)
Noise Level @ 1m	<40 dBA at 30°C (86°F)

MECHANICAL SPECIFICATIONS


Dimensions	1150 mm x 755 mm x 155 mm (45.3 in x 29.7 in x 6.1 in)
Weight	120 kg (264.5 lbs)
Mounting options	Floor or wall mount

COMPLIANCE INFORMATION


Safety	UL 1642, UL 1741, UL 1973, UL 9540, UN 38.3, IEC 62109-1, IEC 62619, CSA C22.2.107.1
Emissions	FCC Part 15 Class B, ICES 003, EN 61000 Class B
Environmental	RoHS Directive 2011/65/EU, WEEE Directive 2012/19/EU, 2006/66/EC
Seismic	AC156, IEEE 693-2005 (high)

TYPICAL SYSTEM LAYOUTS

DC-COUPLED POWERWALL SYSTEM WITH SOLAR

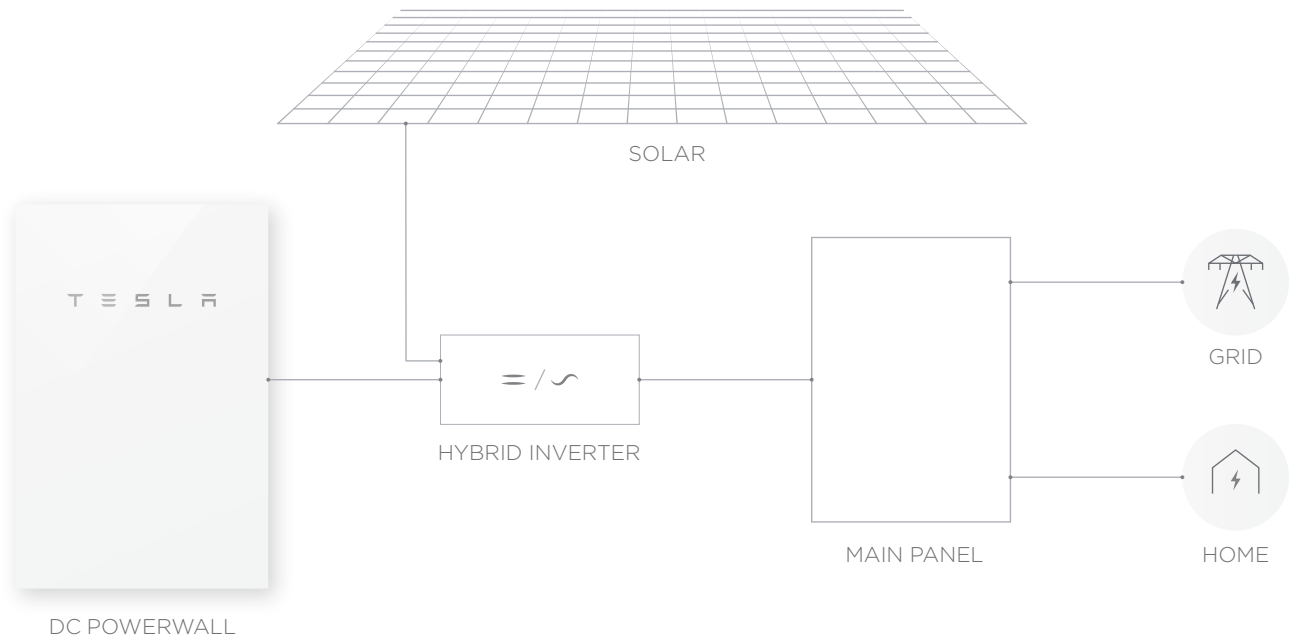

AC-COUPLED POWERWALL SYSTEM WITH SOLAR

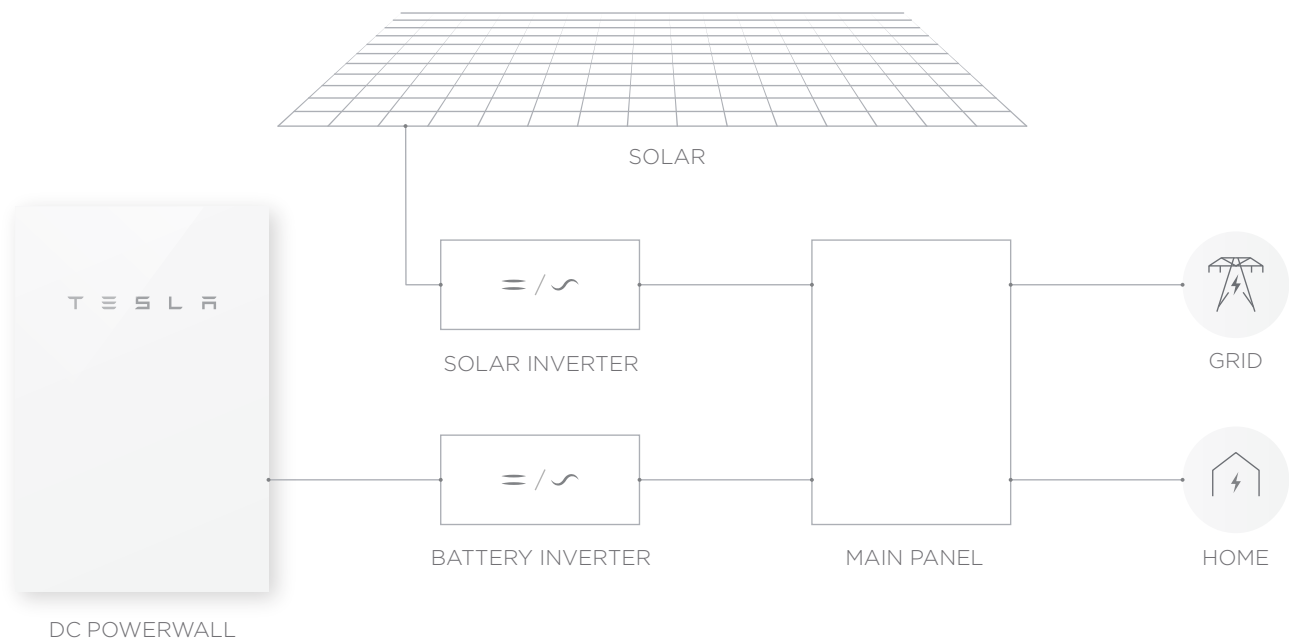

CONTACT US

[CONSOLIDATEDENERGY.COM.AU](https://www.consolidatedenergy.com.au)

VIC

p. (03) 9794 8250

e. vic@consolidatedenergy.com.au

NSW

p. (02) 9625 0915

e. nsw@consolidatedenergy.com.au

QLD

p. (07) 3271 4070

e. qld@consolidatedenergy.com.au

WA

p. (08) 6270 6400

e. wa@consolidatedenergy.com.au

SA

p. (08) 8445 8111

e. sa@consolidatedenergy.com.au

ACT

p. (02) 6260 1455

e. act@consolidatedenergy.com.au